

A 90 MULTIFUNCTION SHOWER CUBICLE, CORNER ENTRY WITH 2 SLIDING DOORS + 2 FIXED PANELS IN LINE

Dimensions				Code	Installation		Mixer		Hydro-massage	Glass	Select the finishing					
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T			Shiny white panel			Matt white panel		
														1	AA	AB
											White	Silver	Chrome	White	Silver	Chrome

STANDARD WITHOUT DOME																
					D	S	M-	T-		1	AA	AB	AK	UA	UB	UK
80x80	4,5	209,5	38	EONA80	-	-			-							
80x80	11,5	216,5	38	EONA89	-	-			-							
90x90	4,5	209,5	45	EONA90	-	-			-							
90x90	11,5	216,5	45	EONA99	-	-			-							
100x80	4,5	209,5	45	EONA100					-							
100x80	11,5	216,5	45	EONA109					-							

STANDARD WITH DOME + LIGHT																
					D	S	M	T	T-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	214	38	EONA80	-	-										
80x80	11,5	221	38	EONA89	-	-										
90x90	4,5	214	45	EONA90	-	-										
90x90	11,5	221	45	EONA99	-	-										
100x80	4,5	214	45	EONA100												
100x80	11,5	221	45	EONA109												


HYDRO WITHOUT DOME																
					D	S	M	T	1-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	209,5	38	EONA80	-	-										
80x80	11,5	216,5	38	EONA89	-	-										
90x90	4,5	209,5	45	EONA90	-	-										
90x90	11,5	216,5	45	EONA99	-	-										
100x80	4,5	209,5	45	EONA100												
100x80	11,5	216,5	45	EONA109												

HYDRO WITH DOME + SHOWER HEAD + LIGHT																
					D	S	M	T	1F-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	214	38	EONA80	-	-										
80x80	11,5	221	38	EONA89	-	-										
90x90	4,5	214	45	EONA90	-	-										
90x90	11,5	221	45	EONA99	-	-										
100x80	4,5	214	45	EONA100												
100x80	11,5	221	45	EONA109												


HAMMAM (CHROMOLIGHT WITH REMOTE CONTROL)																
					D	S	M	T	1N-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	229,5	38	EONA80	-	-										
80x80	11,5	236,5	38	EONA89	-	-										
90x90	4,5	229,5	45	EONA90	-	-										
90x90	11,5	236,5	45	EONA99	-	-										
100x80	4,5	229,5	45	EONA100												
100x80	11,5	236,5	45	EONA109												



EON A HAMMAM CHROME

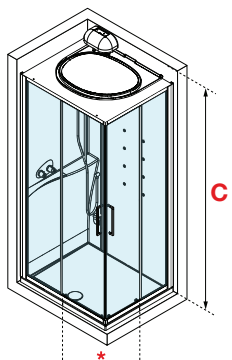

S Left

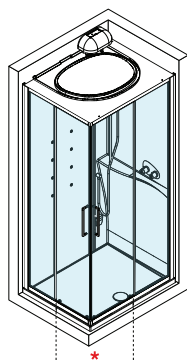

D Right

OPTIONAL



OPAL ACRYLIC SEAT

Code	Price
SED030PL	



EON 2P HAMMAM WHITE




EON A HAMMAM SILVER




EON G HAMMAM CHROME

EON | FINISHES


STRUCTURE FINISHES



White
code A




Silver
code B



Chrome
code K



Shiny white
code A



Soft white
code U

GLASS FINISHES



Clear
thickness 6 mm

EON | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower

Dome with Shower head

Body hydromassage

Soap holder

Bluetooth

Remote control

Chromolight (hammam version)
Led ceiling (for standard version
and hydro with dome)

Steam generator



EON 2P HAMMAM CHROME



Manual or Thermostatic mixer



Integrated soap holder





Body hydromassage (8 jets)




Remote control
(Only for Hammam version)





EON

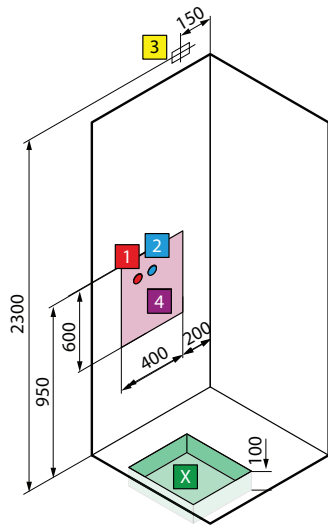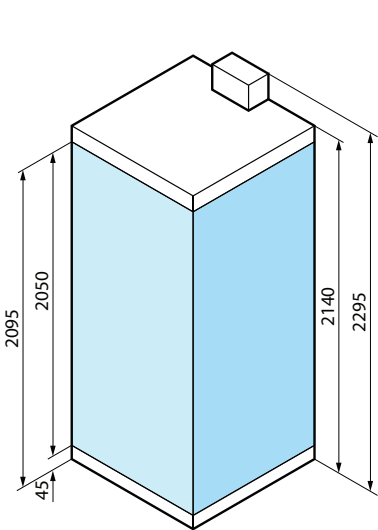


for model
GF/A80 - GF/A90 - G90 - R90

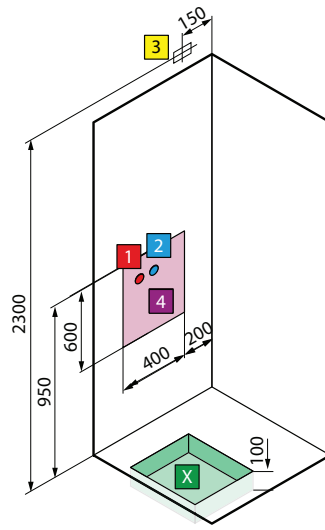

left version right version
for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**






model	A ± 4	B ± 4
GF/A80	802	802
GF/A90	902	902
G90	902	902






model	A ± 4	B ± 4
R90	902	902

S VERSION LEFT

D VERSION RIGHT



model	A ± 4	B ± 4
A100x80	1002	802
2P120x80	1202	802
2P120x90	1202	902
2P120x80/90	1202	902





Visual inspection not possible

WARNING!
It could be dangerous for pacemaker wearer


HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Nominal power rating: 2500 W
Maximum absorbed power
HAMMAM: 2600 W
BASE and IDRO: 50 W




WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

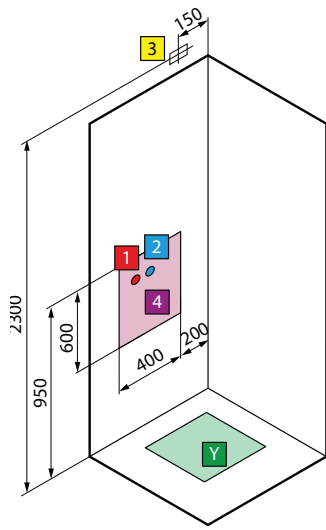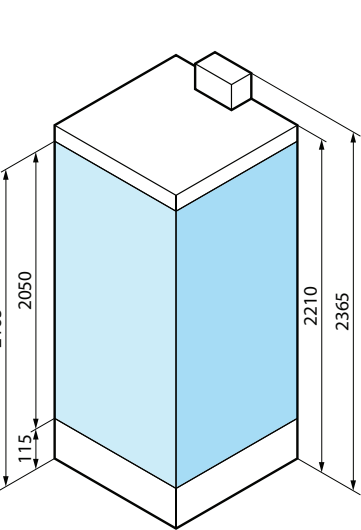


for model
GF/A80 - GF/A90 - G90 - R90

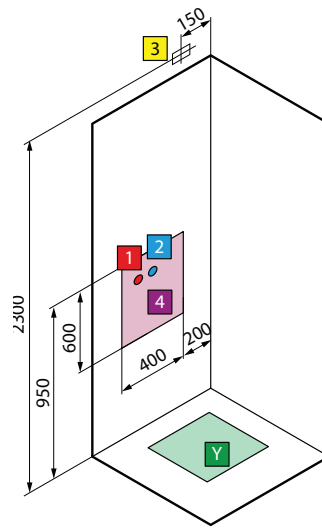

left version
for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**

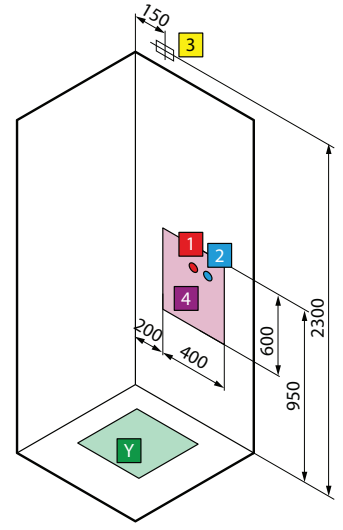




model	A ± 4	B ± 4	C	D	E
GF/A80	802	802	150	400	400
GF/A90	902	902	150	500	500
G90	902	902	150	500	500






model	A ± 4	B ± 4	C	D	E
R90	902 ± 4	902	156	500	500

S VERSION LEFT

D VERSION RIGHT



model	A ± 4	B ± 4	C	D	E
A100x80	1002	802	150	600	400
2P120x80	1202	802	150	800	400
2P120x90	1202	902	150	800	500
2P120x80/90	1202	902	150	800	500



Visual inspection
not possible



HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Nominal power rating: 2500 W
Maximum absorbed power
HAMMAM: 2600 W
BASE and IDRO: 50 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.