


Dimensions				Code	Mixer		Glass	Select the finishing					
								Shiny white panel			Matt white panel		
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		T		1	AA	AB	AK	UA	UB	UK
C *					Thermostatic		Clear	White	Silver	Chrome	White	Silver	Chrome
STANDARD WITHOUT DOME													
					T-		1	AA	AB	AK	UA	UB	UK
90x90	4,5	209,5	48	EONR90									
90x90	11,5	216,5	48	EONR99									
STANDARD WITH DOME + LIGHT													
					T	T-	1	AA	AB	AK	UA	UB	UK
90x90	4,5	214	48	EONR90									
90x90	11,5	221	48	EONR99									
HYDRO WITHOUT DOME													
					T	1-	1	AA	AB	AK	UA	UB	UK
90x90	4,5	209,5	48	EONR90									
90x90	11,5	216,5	48	EONR99									
HYDRO WITH DOME													
					T	1F-	1	AA	AB	AK	UA	UB	UK
90x90	4,5	214	48	EONR90									
90x90	11,5	221	48	EONR99									
HAMMAM (CHROMOLIGHT WITH REMOTE CONTROL)													
					T	1N-	1	AA	AB	AK	UA	UB	UK
90x90	4,5	229,5	48	EONR90									
90x90	11,5	236,5	48	EONR99									

(Other products)
Please check availability



EON R HAMMAM CHROME

EON



OPTIONAL



OPAL ACRYLIC SEAT

Code	Price
SED030PL	

SED030PL



SAUNA'S FILTER
SOFTENER

Code	Price
R90FLTATC01	

R90FLTATC01

REQUIRED



COMPULSORY
Imperial to Metric flex
waste adaptor

Code	Price
RISCCAB	

RISCCAB



WHITE



TOTAL WHITE



BLACK



SILVER



CORDA

GLAX 2 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL + SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
WHITE	Black soft	Black soft	Soft white	Black	Gloss white	Soft white	White
TOTAL WHITE	Soft white	Soft white	Soft white	White	Gloss white	Soft white	White
BLACK	Soft white	Soft white	Black soft	White	Matt black	Black soft	White
SILVER	Silver	Chrome	Silver	White	Gloss white	Soft white	White
CORDA	Soft white	Soft white	Corda	White	Materic corda	Corda	White

* available depending on the model



GLAX 2 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)



- Thermostatic mixer and Hand shower
- Dome with Shower head
- Body hydromassage
- Soap holder
- Bluetooth
- Foldaway seat
- Electronic soft-touch control panel
- Chromolight (hammam+hydro plus version) LED ceiling (hydro version)
- Steam generator + Steam and aroma dispenser


EON SHOWER TRAY 45 MM

TECHNICAL DATA

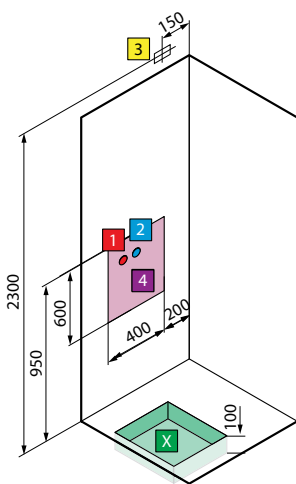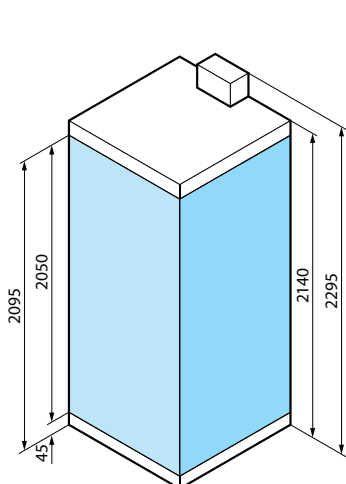


for model

GF/A80 - GF/A90 - G90 - R90


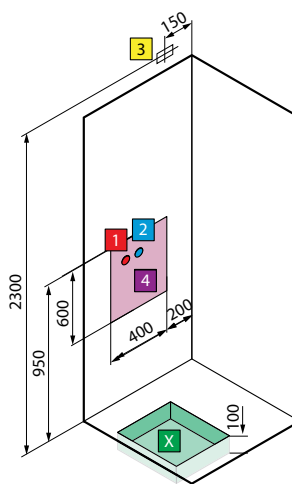


left version

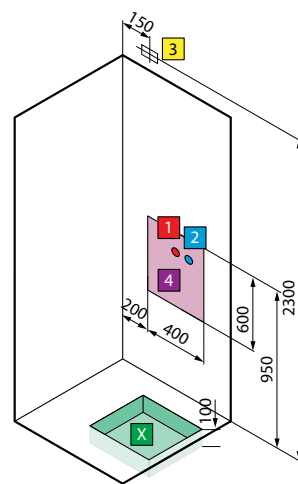


right version

for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**






model	A ± 4	B ± 4
GF/A80	802	802
GF/A90	902	902
G90	902	902






model	A ± 4	B ± 4
R90	902	902

S VERSION LEFT

D VERSION RIGHT



model	A ± 4	B ± 4
A100x80	1002	802
2P120x80	1202	802
2P120x90	1202	902
2P120x80/90	1202	902



Visual inspection
not possible



WARNING!

It could be dangerous for
pacemaker wearer

HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm





ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Nominal power rating: 2500 W
Maximum absorbed power
HAMMAM: 2600 W
BASE and IDRO: 50 W

WARNING! Install a 30mA differential switch upstream of the appliance
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

EON SHOWER TRAY 115 MM

TECHNICAL DATA

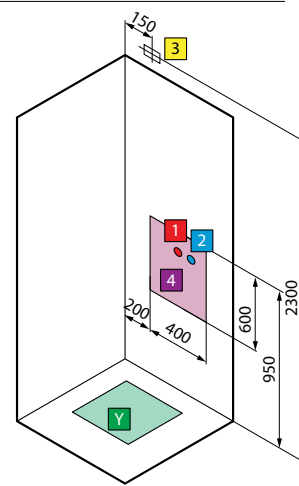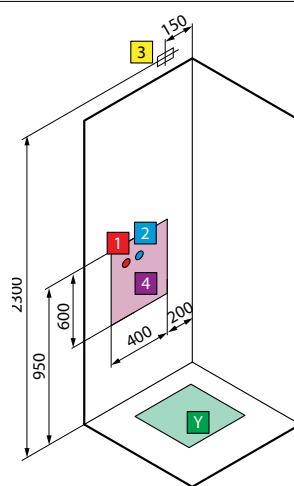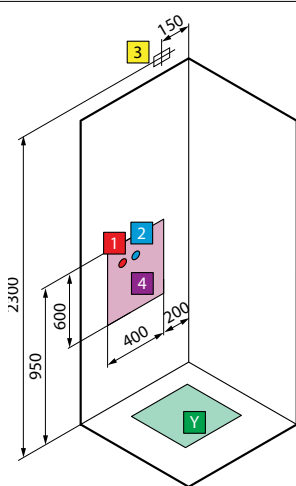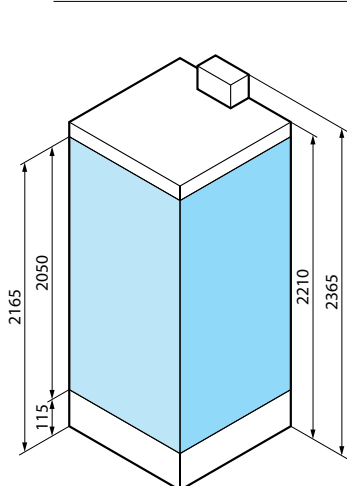



for model

GF/A80 - GF/A90 - G90 - R90


left version

right version

for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**






model	A ± 4	B ± 4	C	D	E
GF/A80	802	802	150	400	400
GF/A90	902	902	150	500	500
G90	902	902	150	500	500






model	A ± 4	B ± 4	C	D	E
R90	902 ± 4	902	156	500	500

S VERSION LEFT

D VERSION RIGHT



model	A ± 4	B ± 4	C	D	E
A100x80	1002	802	150	600	400
2P120x80	1202	802	150	800	400
2P120x90	1202	902	150	800	500
2P120x80/90	1202	902	150	800	500



Visual inspection
not possible



HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Nominal power rating: 2500 W
Maximum absorbed power
HAMMAM: 2600 W
BASE and IDRO: 50 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.