

NEW HOLIDAY 2P120

MULTIFUNCTION SHOWER CUBICLE - SLIDING DOOR AND SIDE PANEL



Dimensions			Code	Version		Mixer	Version	Glass		Select the finishing	
Dimensions	Total height (cm)	Access (cm)		D	S	T		1	2	D	B
	C	*		Right	Left	Thermostatic		Clear	Aqua	White	Silver

STANDARD WITHOUT DOME

				D	S	T-		1	2	D	B
120 x 80	206	47	NNH2P120	-	-						

HYDRO WITHOUT DOME

				D	S	T	19-	1	2	D	B
120 x 80	206	47	NNH2P120	-	-			●			

DOME

120X80X11H	TNT120-A	DOME FOR STANDARD VERSION	
120X80X11H	TNTSOF120-D	DOME WITH SHOWER HEAD	
120X80X19,5H	TNTSAS120-D	DOME WITH STEAM GENERATOR AND SHOWER HEAD	

THE BOTTOM WALLS CAN BE INVERTED FOR INSTALLATIONS ON THE LEFT OR RIGHT

OPTIONAL

Shower tray base in impermeable, antibacterial and nontoxic EVA material

Dimension	Code	Price
120x80	PEDNT120	

White led low voltage light

Code	Price
WLEDCAB	

SAUNA'S FILTER SOFTENER

Code	Price
R90FLTATC01	

REQUIRED



COMPULSORY
Imperial to Metric flex waste adaptor

Code	Price
RISCCAB	

● **IN STOCK UK**
(Other products)
Please check availability



NEW HOLIDAY

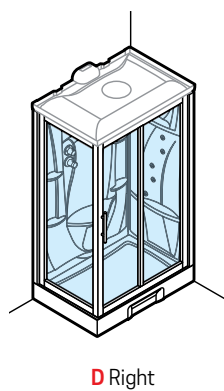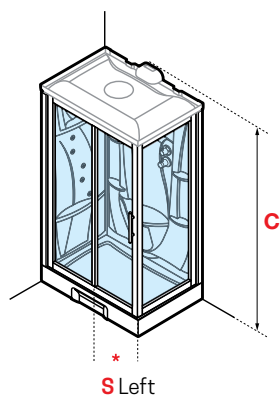



NEXIS A BURLINGTON



NEXIS A WHITE OAK

NEXIS | FINISHES

STRUCTURE FINISHES



Chrome
code K

STRIPES FINISHES



White wood
code A



Grain
code M




White oak
code Q


GLASS FINISHES



Clear
thickness 8 mm



Back walls glass
thickness 5 mm



Burlington
code N







Wenge
code V

NEXIS | FUNCTIONS AND EQUIPMENT (available depending on the model)



- Thermostatic mixer and Hand shower
- Dome with Shower head
- Body hydromassage
- Soap holder
- Bluetooth
- Foldaway seat
- Touch screen remote control
Adjustable steam generator, radio, clock, alarm
- Chromolight
- Steam generator + Steam and aroma dispenser

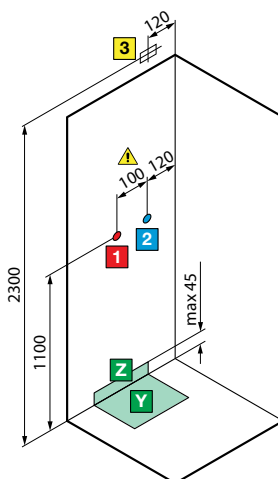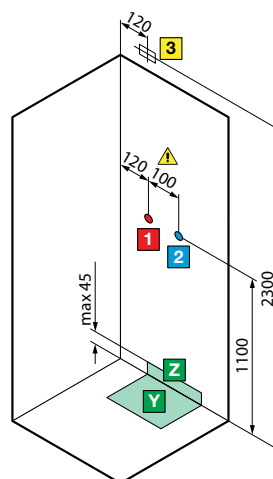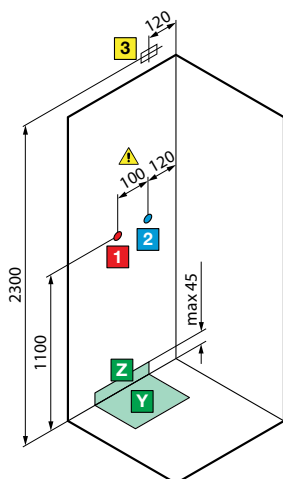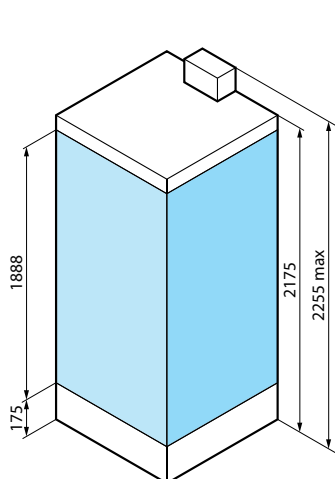


for model

A90 - GF90


left version

right version

per modelli **A80 - GF80 - 2P100x70 - 2P120x80 - SF100x80**





Solo per modello
S2F100





modello	A ± 5	B ± 5	C	D	E
A80	804	804	200	404	300
A90	904	904	200	504	300
GF80	804	804	200	404	300
GF90	904	904	200	504	300

S VERSION LEFT

D VERSION RIGHT



modello	A ± 5	B ± 5	C	D	E
2P100x70	1004	704	200	604	300
2P120x80	1204	804	200	804	300
SF100x80	1004	804	200	604	300





HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:


Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

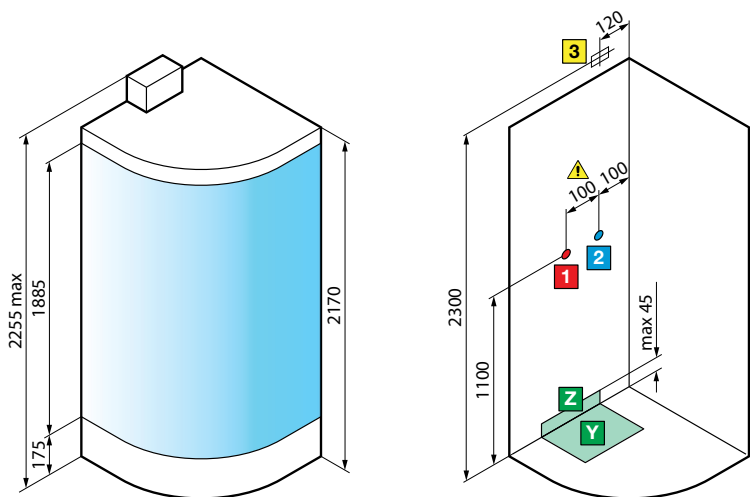

MOD. R90

mod.	A ± 5	B ± 5	C	D	E
R90	904	904	200	504	300



HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.