



BATHTUB WITH GRAIN PANELS



Head rest / Removable seat



Mechanical door lock



Deck mounted bath filler - progressive mixer with 2 functions



Novellini hydromassage System for restore body and mind


BATHTUBS



IRIS

IRIS

EASY-ACCESS BATHTUB



PANELS IN ACRYLIC

Dimensions			Capacity	Code	Select mixer + bathtub finish			Installation		Select the structure			
Cm	H	It.			Waste column (without mixer)	Waste column + bath filler	Waste column + Bath mounted mixer	Left	Right	Shell with frame	1 Panel	2 Panels	3 Panels
STANDARD WITH FRAME													
					C	E		S-	D-	A0	A1	A2	A3
160x70/80	62	250	IRI216070										
170x70/80	62	265	IRI217080										
180x75/85	62	305	IRI218085										
STANDARD WITH FRAME + MIXER													
							F	S-	D-	A0K	A1K	A2K	A3K
160x70/80	62	250	IRI216070										
170x70/80	62	265	IRI217080										
180x75/85	62	305	IRI218085										
HYDRO													
					C	E	F	S-	D-	A0K	A1K	A2K	A3K
160x70/80	62	250	IRI316070T										
170x70/80	62	265	IRI317080T										
180x75/85	62	305	IRI318085T										
HYDRO PLUS													
					C	E	F	S-	D-	A0K	A1K	A2K	A3K
160x70/80	62	250	IRI416070T										
170x70/80	62	265	IRI417080T										
180x75/85	62	305	IRI418085T										

PANELS IN LEAFY HPL

Dimensions			Capacity	Code	Select mixer + bathtub finish			Installation		Select the structure / Panels													
Cm	H	It.			Waste column (without mixer)	Waste column + bath filler	Waste column + Bath mounted mixer	Left	Right	1 Panel	2 Panels	3 Panels	White wood	Grain	Burlington	Wenge							
STANDARD WITH FRAME																							
					C	E		S-	D-	A1	A2	A3	I	M	N	V							
160x70/80	62	250	IRI216070																				
170x70/80	62	265	IRI217080																				
180x75/85	62	305	IRI218085																				
STANDARD WITH FRAME + MIXER																							
							F	S-	D-	A1	A2	A3	I	M	N	V							
160x70/80	62	250	IRI216070																				
170x70/80	62	265	IRI217080		-	-																	
180x75/85	62	305	IRI218085																				
HYDRO																							
					C	E	F	S-	D-	A1	A2	A3	I	M	N	V							
160x70/80	62	250	IRI316070T																				
170x70/80	62	265	IRI317080T																				
180x75/85	62	305	IRI318085T																				
HYDRO PLUS																							
					C	E	F	S-	D-	A1	A2	A3	I	M	N	V							
160x70/80	62	250	IRI416070T																				
170x70/80	62	265	IRI417080T																				
180x75/85	62	305	IRI418085T																				

502

Construction of the code:

Code


+

Select the inside finish

=

Final product code

IRIS COMBY



Dimensions	Code	Installation		Price
Height		D	S	1K
Cm		Right	Left	

BATH SCREEN FOR IRIS BATHTUB - CORNER


150	IRIS2V80	D-		
150	IRIS2V80		S-	
140	IRIS2V804	D-		
140	IRIS2V804		S-	

BATH SCREEN FOR IRIS BATHTUB - CENTER WALL





Pannello Fisso		D	S	1K
Cm		Right	Left	
70	IRIS2VF8070	D-		
75	IRIS2VF8075	D-		
70	IRIS2VF8070		S-	
75	IRIS2VF8075		S-	
70	IRIS2VF80704	D-		
75	IRIS2VF80754	D-		
70	IRIS2VF80704		S-	
75	IRIS2VF80754		S-	




FOR ALL OPTIONALS SEE PAGE 508, 509, 510

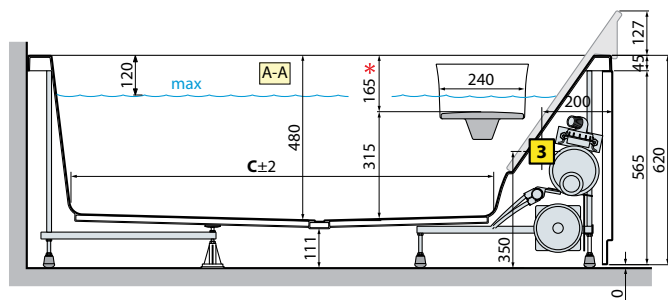

* 145 mm for the model 160x70/80

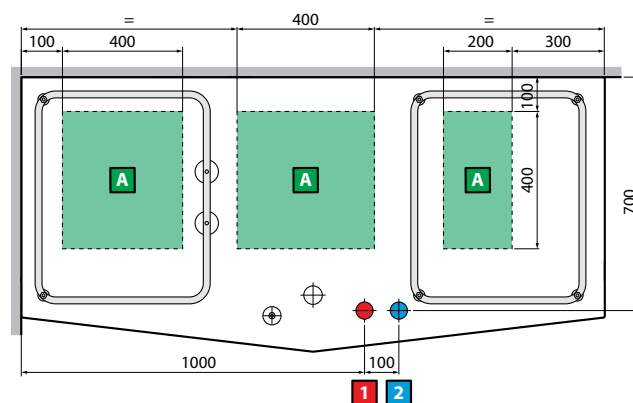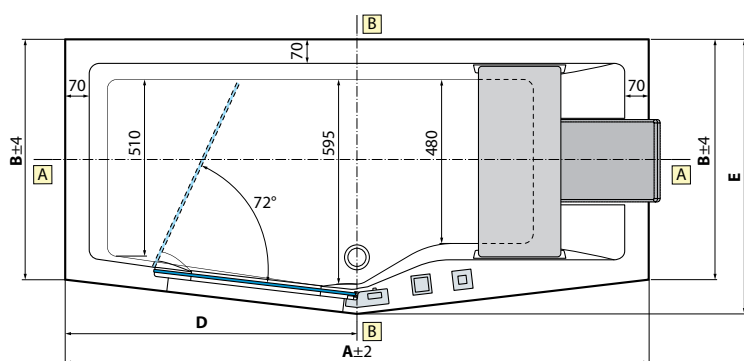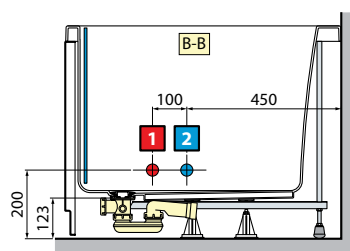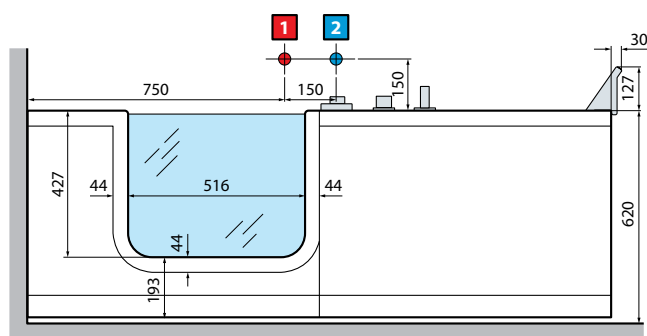

Model	A	B	C	D	E	Capacity litres
160x70/80	1600	700	1140	860	800	250
170x70/80	1700	700	1235	850	800	265
180x75/85	1800	750	1345	860	850	305



WARNING!

It could be dangerous for pacemaker wearer


Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

HYDRAULIC CHARACTERISTIC





6 Whirlpool jets
16 Airpool jets
Siphon connection 1 1/2"

ELECTRICAL CHARACTERISTIC



Tension: 220-230 V
Frequency: 50 Hz
Maximum power consumption: 950 W
Whirlpool: 550 W
Airpool: 400 W

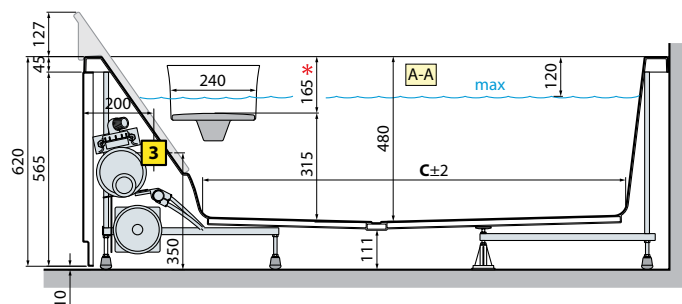

* 145 mm for the model 160x70/80

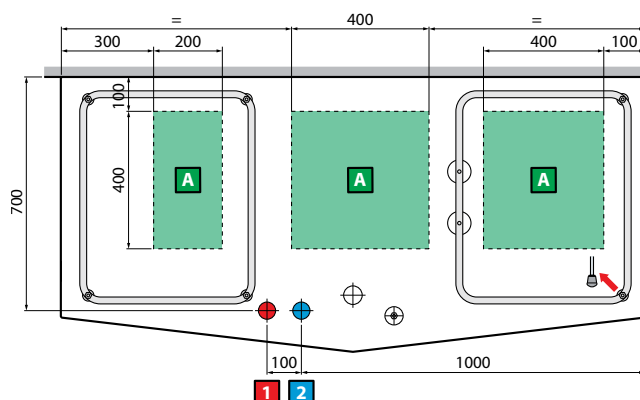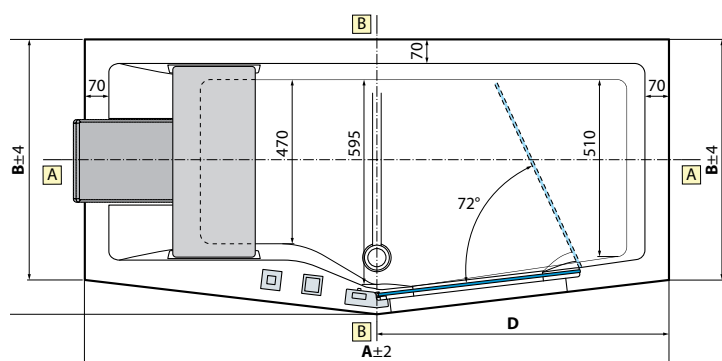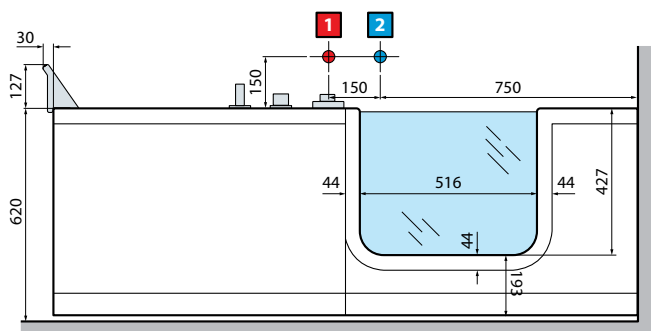

Model	A	B	C	D	E	Capacity litres
160x70/80	1600	700	1140	860	800	250
170x70/80	1700	700	1235	850	800	265
180x75/85	1800	750	1345	860	850	305



WARNING!

It could be dangerous for pacemaker wearer

Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

HYDRAULIC CHARACTERISTIC

6 Whirlpool jets
16 Airpool jets
Siphon connection 1 1/2"

ELECTRICAL CHARACTERISTIC

Tension: 220-230 V
Frequency: 50 Hz
Maximum power consumption: 950 W
Whirlpool: 550 W
Airpool: 400 W