

NEXIS DUAL



MULTIFUNCTION COMPLETE STEAM CUBICLE - 2 SLIDING DOORS + 2 FIXED PANELS IN LINE

Dimensions				Code	Installation			Glass	Select the finishing				
Dimensions	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	T		A	M	Q	N	V
					Right	Left	Thermo-static	Clear	Wood white	Grain	White oak	Burlington	Wenge
CENTRE WALL INSTALLATION													
					D	S	T5-	1K	A	M	Q	N	V
170X90	H 8	237	68	NEX2A170	-	-							
170X90	H 15	244	68	NEX2A179	-	-							
CORNER INSTALLATION													
					D	S	T5-	1K	A	M	Q	N	V
170X90	H 8	237	68	NEX2A170									
170X90	H 15	244	68	NEX2A179									

REQUIRED

COMPULSORY
Imperial to Metric flex waste adaptor

Code	Price
RISCCAB	

OPTIONAL

SAUNA'S FILTER SOFTENER

Code	Price
R90FLTATC01	

410





Construction of the code:

Code + Installation + Mixer + Glass + Finishes = Final product code



NEXIS

NEXIS DUAL WHITE WOOD

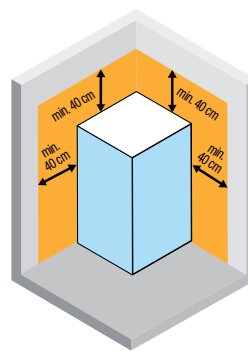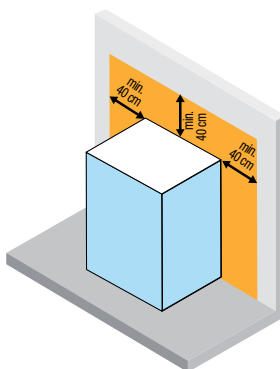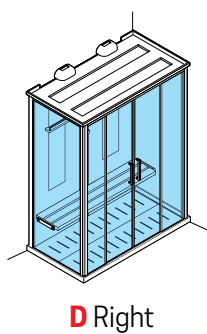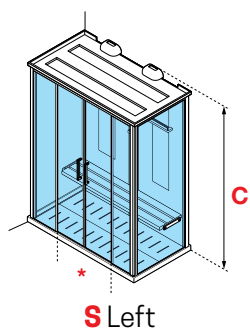

RECIRCULATED
AIR IN THE
BATHROOM MUST
BE GUARANTEED.



SKILL A 120X80 SOFT WHITE




SKILL A 120X80 PEARL GREY




SKILL DUAL GLOSSY BLUE

SKILL | FINISHES

FINISHES

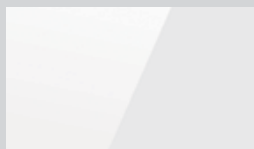


Shiny white




Soft White


STRIPES FINISHES




Glossy Blue
cod N0




Light grey
cod N1



Dove grey
cod N2



Pearl grey
cod N3



Soft White
cod U

GLASS FINISHES



Clear

SKILL | FUNCTIONS AND EQUIPMENT (available depending on the model)



Thermostatic mixer and Hand shower

Dome with Shower head

Body hydromassage

Cascade

Soap holder

Bluetooth

Foldaway seat


Electronic soft-touch control panel

Chromolight (hammam version)
Led ceiling (essential version)



Steam generator + Steam and aroma
dispenser

NEXIS DUAL SHOWER TRAY 80 MM

TECHNICAL DATA

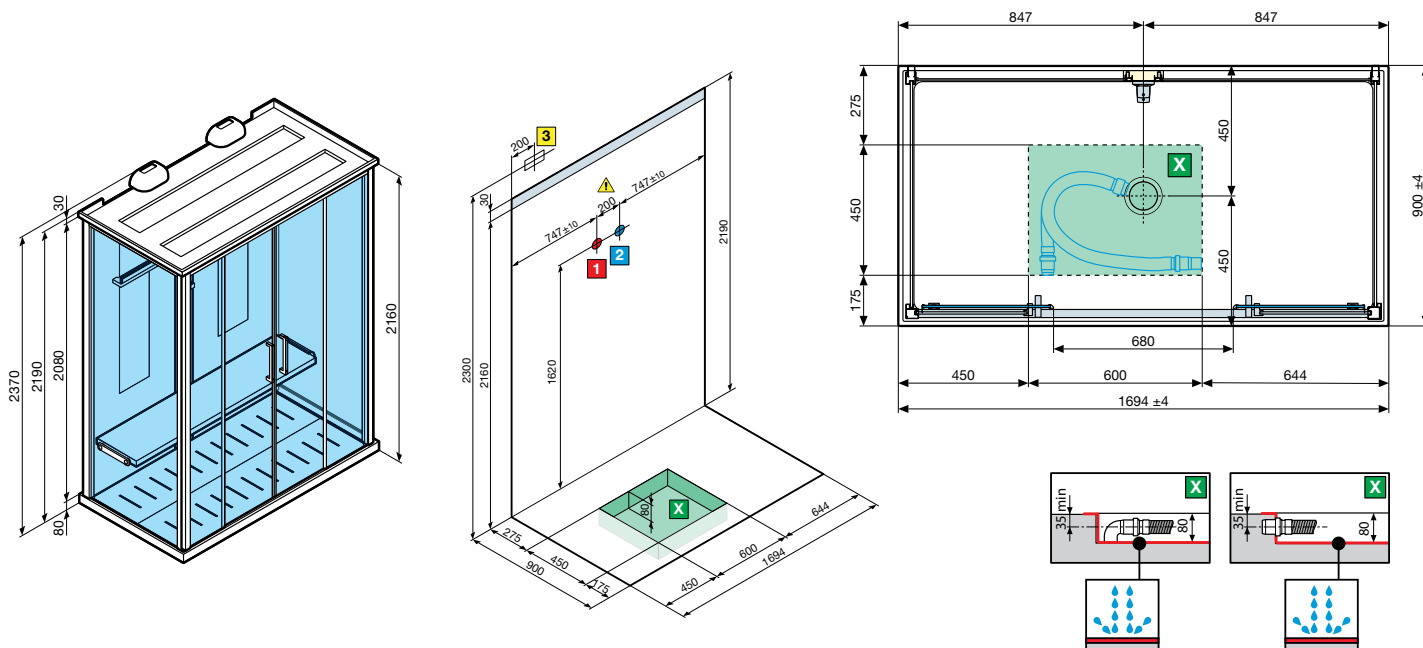

NEXIS DUAL SHOWER TRAY 150 MM

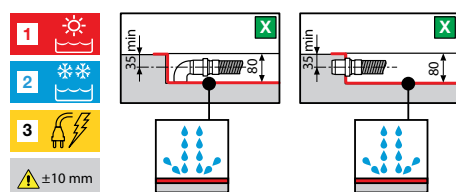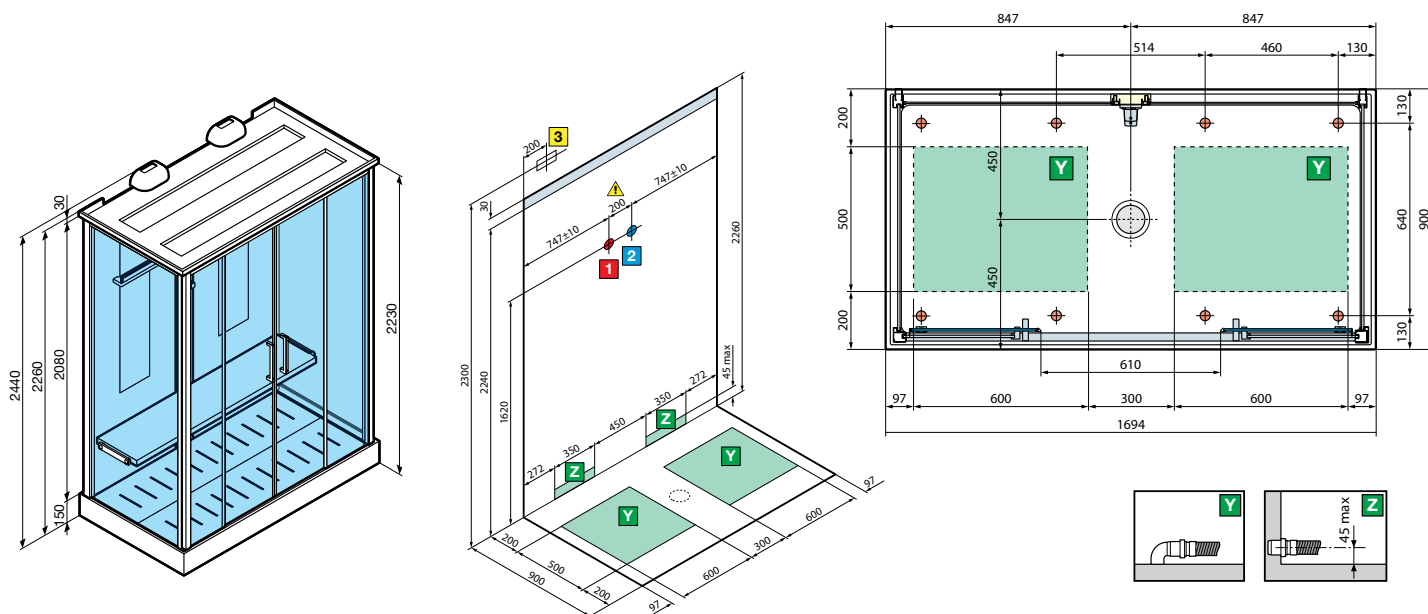

EN55014-1
EN55014-2
The product is certified according to electromagnetic compatibility standards

WARNING!
It could be dangerous for pacemaker wearer

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2-5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection Ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 5100 W
Nominal power rating: 5000 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.