

 210 cm
 8 mm

Design Marco Pellici

Dimensions				Code	Installation		Mixer	Glass	Select the finishing								
									Shiny white finish				Matt white finish				
Dimensions	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	T	1	AN0	AN1	AN2	AN3	UN0	UN1	UN2	UN3	UU
C *					Right	Left	Thermo-static	Clear	Glossy Blue	Light grey	Dove grey	Pearl grey	Glossy Blue	Light grey	Dove grey	Pearl grey	Soft white

[illegible]

					D	S	T5-	1	AN0	AN1	AN2	AN3	UN0	UN1	UN2	UN3	UU
100x80	H 4,5	211	44	SKIA100													
100x80	H 12,5	219	44	SKIA109													
120x80	H 4,5	211	51	SKIA120													
120x80	H 12,5	219	51	SKIA129													
120x90	H 4,5	211	54	SKIA290													
120x90	H 12,5	219	54	SKIA299													
120x100	H 4,5	211	58	SKIA210													
120x100	H 12,5	219	58	SKIA219													

OPTIONAL



Imperial to Metric flex
waste adaptor

Code	Price
RISCCAB	




Code
R90FLTATC01

Code	Price
R90FLTATC01	




SKILL


SKILL A PEARL GREY



S Left





D Right




RECIRCULATED
AIR IN THE
BATHROOM MUST
BE GUARANTEED.

SKILL SHOWER TRAY 45 MM


TECHNICAL DATA

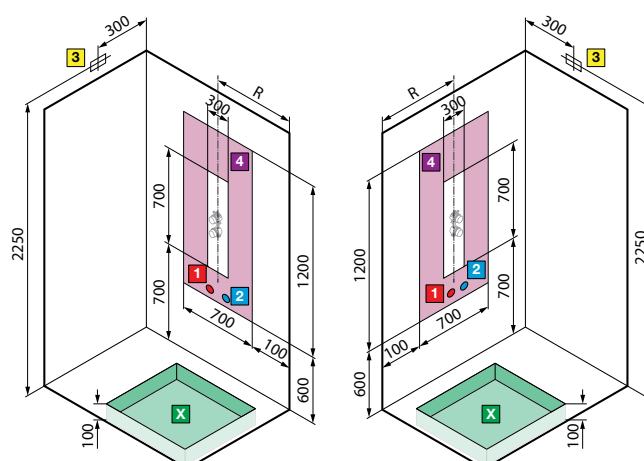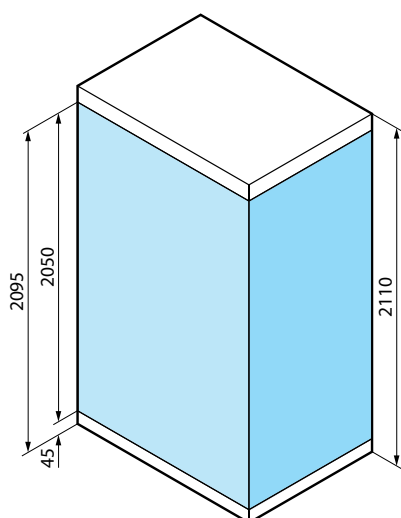

left version right version
for model **A100x80 - A120x80 - A120x90 - A120x100**

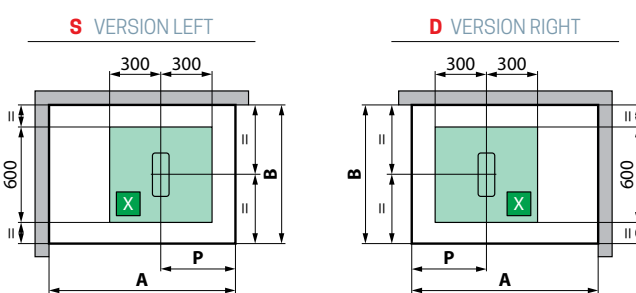

model	A ± 2	B ± 2	P	R
A100x80	1000	800	400	450
A120x80	1200	800	500	550
A120x90	1200	900	500	550
A120x100	1200	1000	500	550
2P140x80	1400	800	600	650

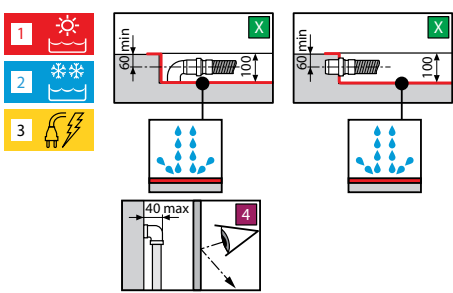

Visual inspection
not possible

 **EN55014-1
EN55014-2**
The product is certified according
to electromagnetic compatibility
standards

 **WARNING!**
It could be dangerous for
pacemaker wearer



HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

SKILL SHOWER TRAY 125 MM

TECHNICAL DATA

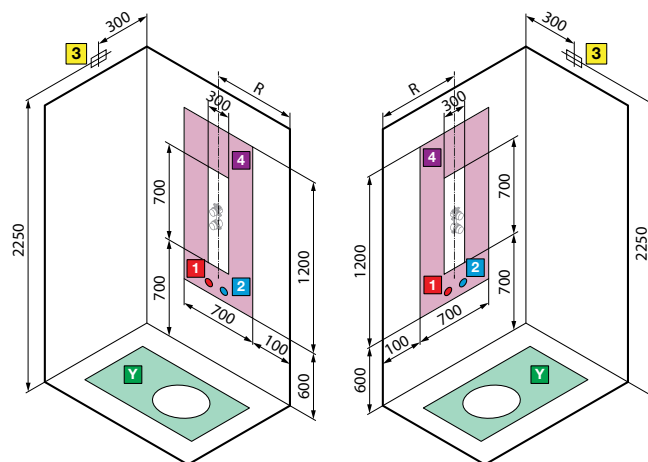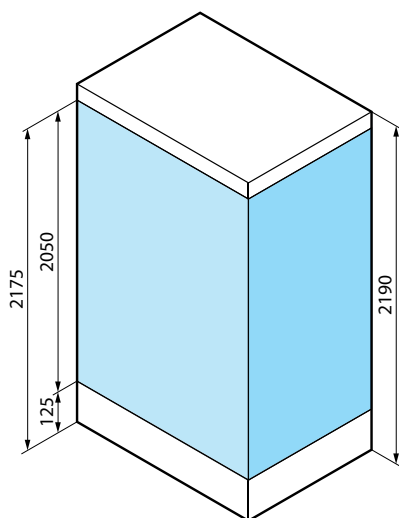


left version


right version

for model **A100x80 - A120x80 - A120x90 - A120x100**



S VERSION LEFT



D VERSION RIGHT



model	A ± 2	B ± 2	P	R
A100x80	1000	800	400	450
A120x80	1200	800	500	550
A120x90	1200	900	500	550
A120x100	1200	1000	500	550
2P140x80	1400	800	600	650



Visual inspection
not possible



EN55014-1
EN55014-2

The product is certified according
to electromagnetic compatibility
standards



WARNING!

It could be dangerous for
pacemaker wearer

HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.