

SKILL DUAL

MULTIFUNCTION COMPLETE STEAM CUBICLE - 2 SLIDING DOORS + 2 FIXED PANELS IN LINE

Design Marco Pellici

[illegible]

REQUIRED



COMPULSORY
Imperial to Metric flex
waste adaptor


Code	Price
RISCCAB	

OPTIONAL




SAUNA'S FILTER SOFTENER



Code	Price
R90FLTATC01	



S Left




D Right

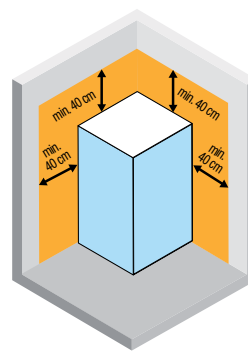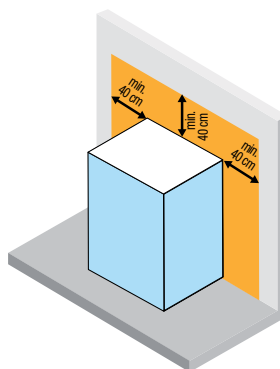



**RECIRCULATED
AIR IN THE
BATHROOM MUST
BE GUARANTEED.**

SKILL DUAL SHOWER TRAY 45 MM

TECHNICAL DATA

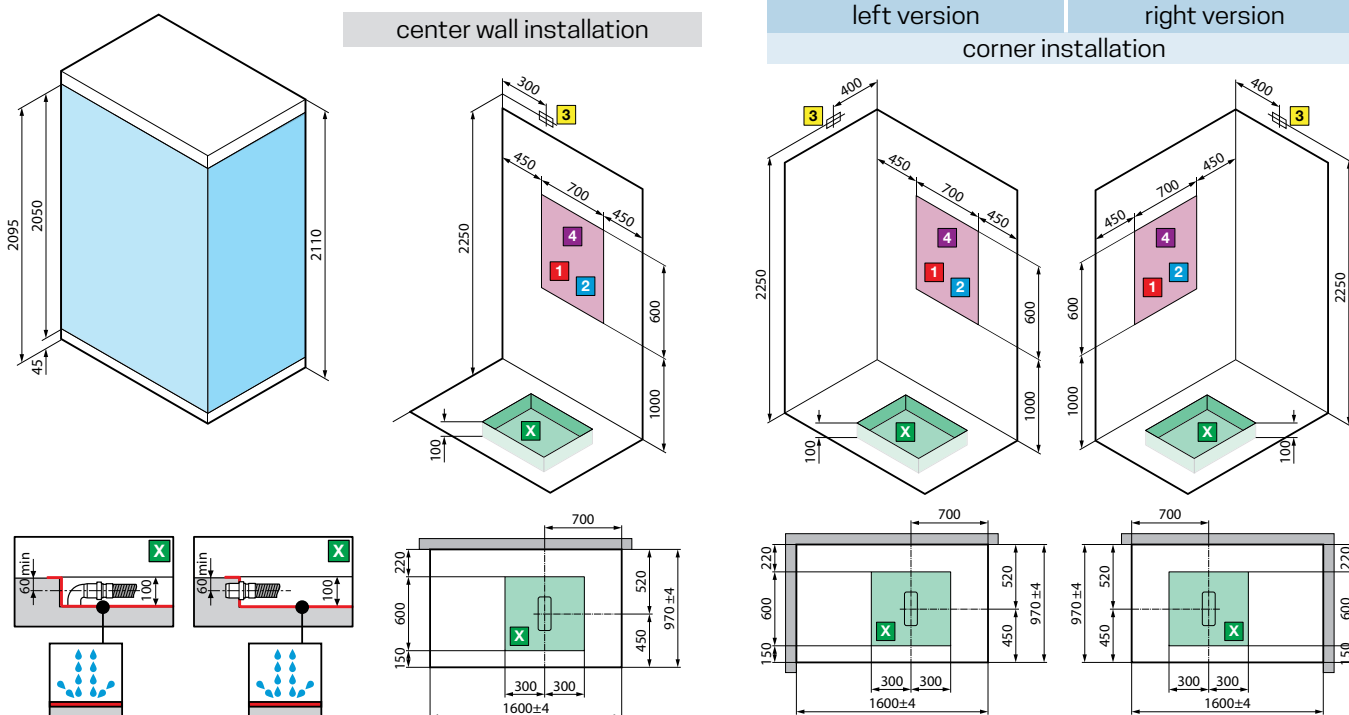

SKILL DUAL SHOWER TRAY 125 MM

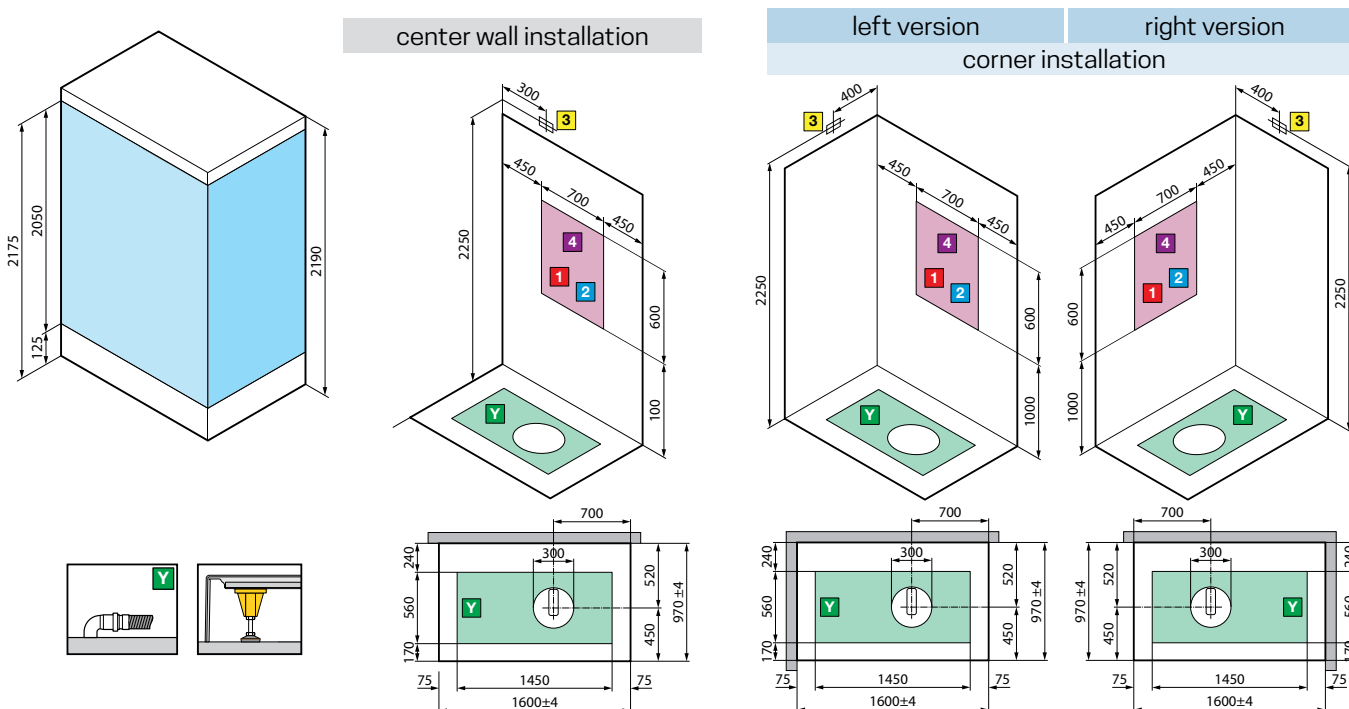

EN55014-1
EN55014-2

The product is certified according to electromagnetic compatibility standards

WARNING!
It could be dangerous for pacemaker wearer

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection $\varnothing$ 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 5100 W
Nominal power rating: 5000 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening $\geq$ 3 mm.