



Celsius Hammam




Hammam



Hammam Hydro

Installation



In recess Right corner Left corner Center of wall

Measures

120x120 H223 200x120 H223
150x120 H223 200x150 H223
150x150 H223

Features	HAMMAM	HAMMAM HYDRO
Electronic panel with 3 heat settings	•	•
Bench	1	1
Glass thickness 8 mm	•	•
Lacquered steel handle	•	•
Aroma vapouriser	•	•
Vertical whirlpool (12 jets)	–	•
Thermostatic mixer and hand shower	•	•
Shower head 30x30 cm with waterfall	–	•
External side mirror	•	•
LED lighting	•	•
Bluetooth sound system	OPTIONAL	OPTIONAL
LED lighting with Cromolight	OPTIONAL	OPTIONAL
Hanger	OPTIONAL	OPTIONAL
Emergency button ¹	OPTIONAL	OPTIONAL
Semi-automatic boiler descaling system ²	OPTIONAL	OPTIONAL

FRAME COLOUR



TENT GREY
cod. 8Y



DUSTY GREY
cod. 8W



GRAVEL GREY
cod. 86

¹ Functions as product switch-off, alarm sound, light switch-on, remote alarm contact shut-off.





² INTENSIVE USE: it is mandatory to install a reverse osmosis demineraliser (2°F) to remove any minerals in the water from the steam generator; INTERMITTENT USE: we recommend a semi-automatic boiler descaling system, requiring a maintenance and cleaning procedure every 500 hours approximately. The costs of ordinary **boiler descaling maintenance** are charged on the customer.

CELSIUS HAMMAM 120x120

Installation	Code	Side panel		Tech			Boiler Descaling		Frame Colour		
		Glass	Wall	White LED	Chromolight +BT	Chromolight+BT +Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey

HAMMAM 120X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CL021212BI	-									
Right corner	CL021212AD										
Left corner	CL021212AS										
Centre of wall	CL021212CP										

HAMMAM HYDRO 120X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CLH21212BI	-									
Right corner	CLH21212AD										
Left corner	CLH21212AS										
Centre of wall	CLH21212CP										







CELSIUS HAMMAM 150x120

Installation	Code	Side panel		Tech			Boiler Descaling		Frame Colour		
		Glass	Wall	White LED	Chromolight +BT	Chromolight+BT +Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey

HAMMAM 150X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CL021512BI	-									
Right corner	CL021512AD										
Left corner	CL021512AS										
Centre of wall	CL021512CP										

HAMMAM HYDRO 150X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CLH21512BI	-									
Right corner	CLH21512AD										
Left corner	CLH21512AS										
Centre of wall	CLH21512CP										




CELSIUS HAMMAM 200x120

Installation	Code	Side panel		Tech			Boiler Descaling		Frame Colour		
		Glass	Wall	White LED	Chromolight +BT	Chromolight+BT +Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey

HAMMAM 200X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CL022012BI	-	☐								
Right corner	CL022012AD		☐								
Left corner	CL022012AS		☐	☐	☐	☐	☐	☐	☐	☐	☐
Centre of wall	CL022012CP		☐								

HAMMAM HYDRO 200X120 H223											
		G	W	Ø	6	7	X-	C-	8Y	8W	86
In recess	CLH22012BI	-	☐								
Right corner	CLH22012AD		☐								
Left corner	CLH22012AS		☐	☐	☐	☐	☐	☐	☐	☐	☐
Centre of wall	CLH22012CP		☐								

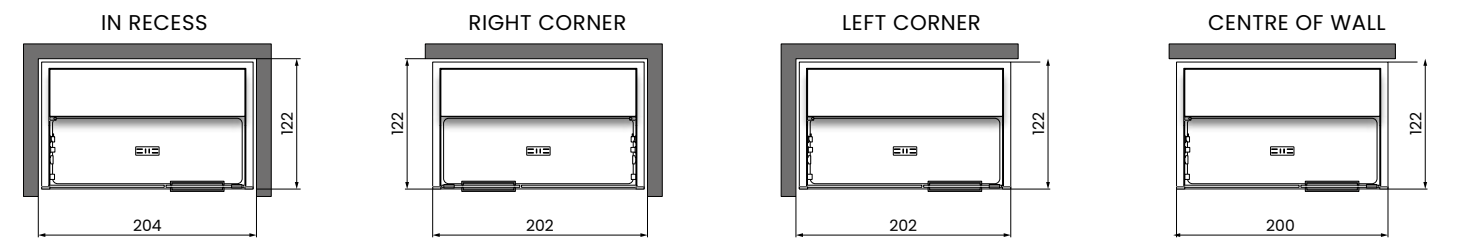

CELSIUS HAMMAM 150x150

Installation	Code	Side panel		Tech			Boiler Descaling		Frame Colour		
		Glass	Wall	White LED	Chromolight +BT	Chromolight+BT +Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey


HAMMAM 150X150 H223

		G	W	0	6	7	X-	C-	8Y	8W	86
In recess	CL021515BI	-	☐								
Right corner	CL021515AD	☐	☐								
Left corner	CL021515AS	☐	☐								
Centre of wall	CL021515CP	-	☐	☐	☐	☐	☐	☐	☐	☐	☐
Center of wall right	CL021515CD	☐									
Centre of wall left	CL021515CS	☐									


HAMMAM HYDRO 150X150 H223

		G	W	0	6	7	X-	C-	8Y	8W	86
In recess	CLH21515BI	-	☐								
Right corner	CLH21515AD	☐	☐								
Left corner	CLH21515AS	☐	☐								
Centre of wall	CLH21515CP	-	☐	☐	☐	☐	☐	☐	☐	☐	☐
Center of wall right	CLH21515CD	☐									
Centre of wall left	CLH21515CS	☐									

SIDE PANEL WALL

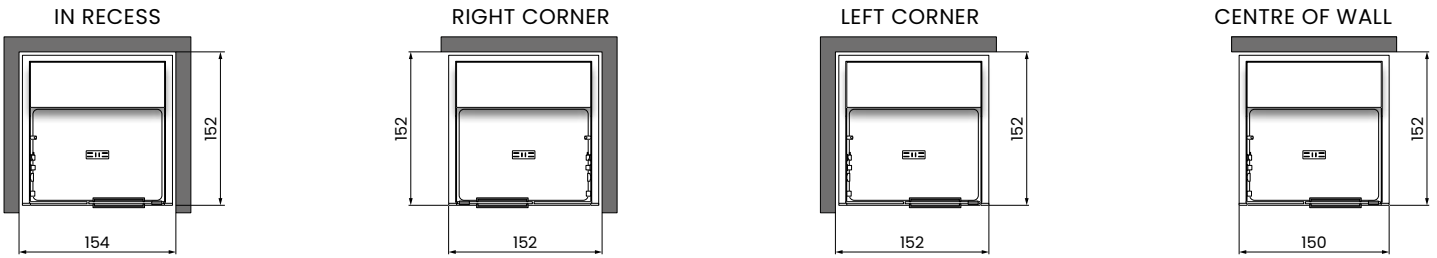

SIDE PANEL GLASS

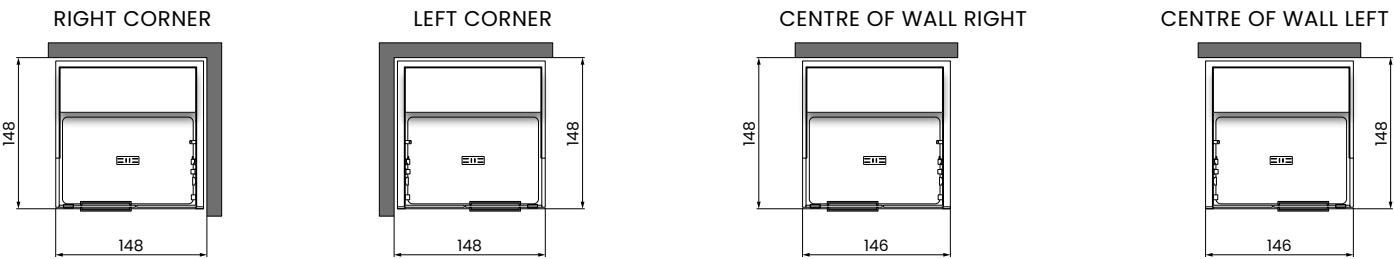

ACCESSORIES



HANGER		
Finish	Code	Price
Tent Grey	CLA2APP01-8Y	☐
Dusty Grey	CLA2APP01-8W	☐
Gravel Grey	CLA2APP01-86	☐

CELSIUS HAMMAM 200x150

Installation	Code	Side panel		Tech			Boiler Descaling		Frame Colour		
		Glass	Wall	White LED	Chromolight +BT	Chromolight+BT +Emergency	Without	With	Tent Grey	Dusty Grey	Gravel Grey


HAMMAM 200X150 H223

		G	W	0	6	7	X-	C-	8Y	8W	86
In recess	CL022015BI	-	☐								
Right corner	CL022015AD	☐	☐								
Left corner	CL022015AS	☐	☐								
Centre of wall	CL022015CP	-	☐	☐	☐	☐	☐	☐	☐	☐	☐
Center of wall right	CL022015CD	☐									
Centre of wall left	CL022015CS	☐									


HAMMAM HYDRO 200X150 H223

		G	W	0	6	7	X-	C-	8Y	8W	86
In recess	CLH22015BI	-	☐								
Right corner	CLH22015AD	☐	☐								
Left corner	CLH22015AS	☐	☐								
Centre of wall	CLH22015CP	-	☐	☐	☐	☐	☐	☐	☐	☐	☐
Center of wall right	CLH22015CD	☐									
Centre of wall left	CLH22015CS	☐									


SIDE PANEL WALL

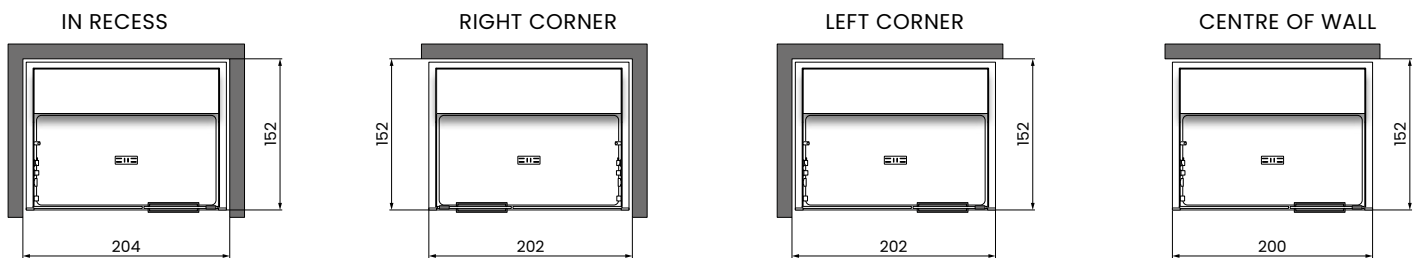

SIDE PANEL GLASS


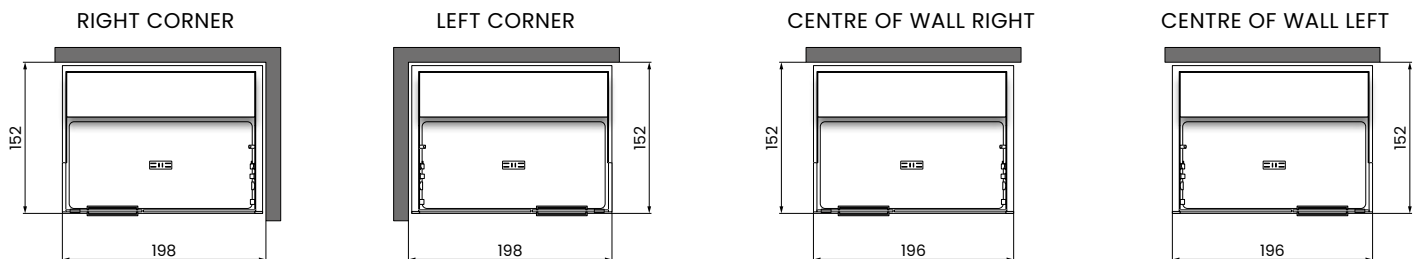


Code composition = Code + Side panel + Tech + Boiler Descaling + Frame Colour

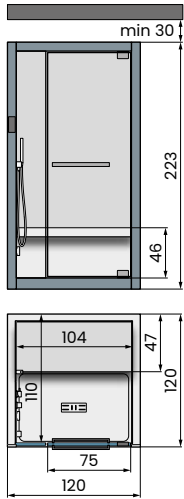



CELSIUS HAMMAM 120x120 WALL

Power supply: 3kW

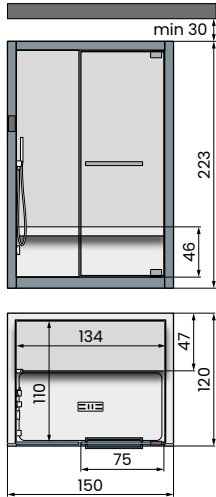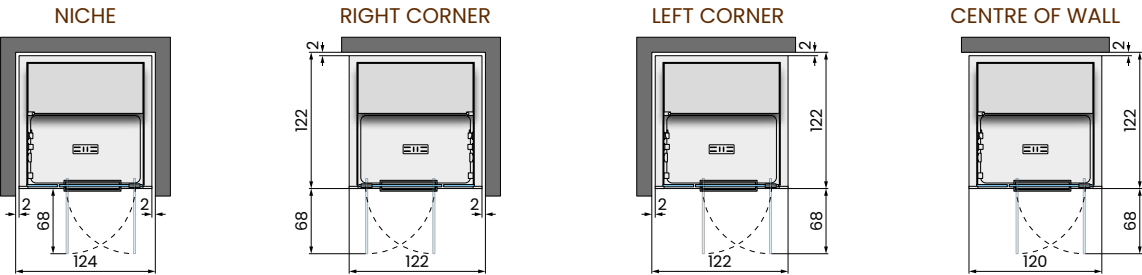



CELSIUS HAMMAM 150x120 WALL

Power supply: 4,5kW

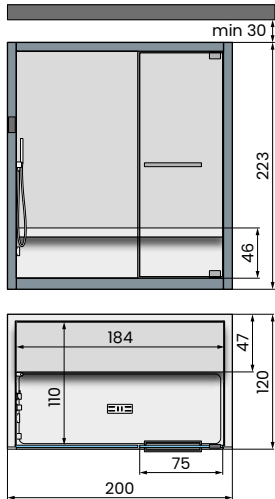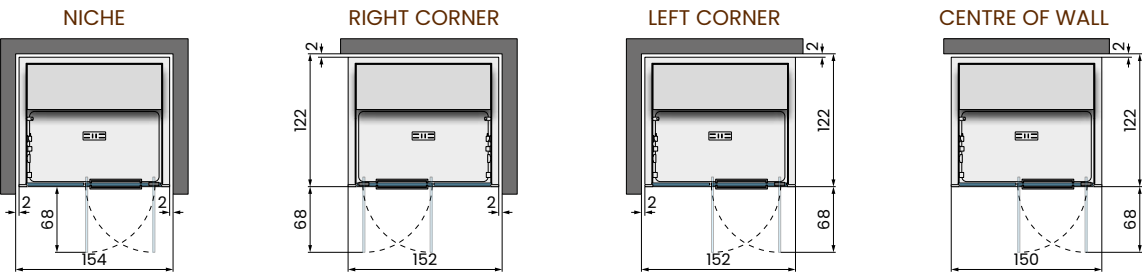


CELSIUS HAMMAM 200x120 WALL


Power supply: 4,5kW

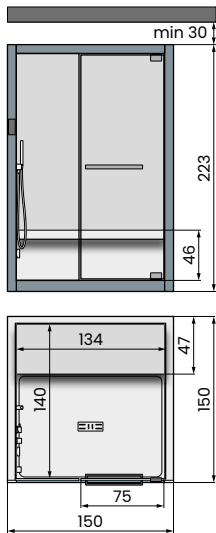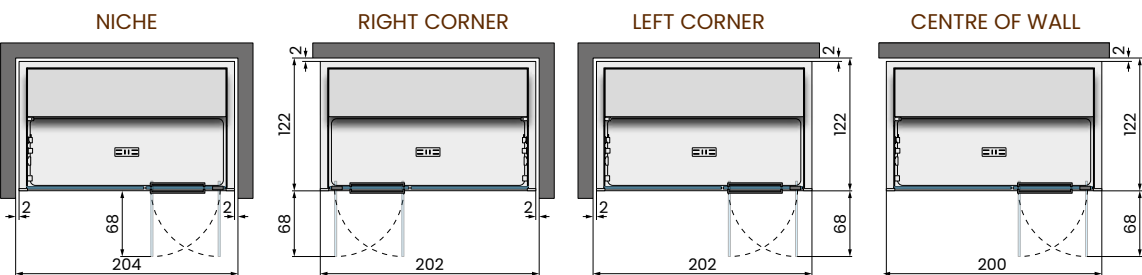

CELSIUS HAMMAM 150x150 WALL

Power supply: 4,5kW


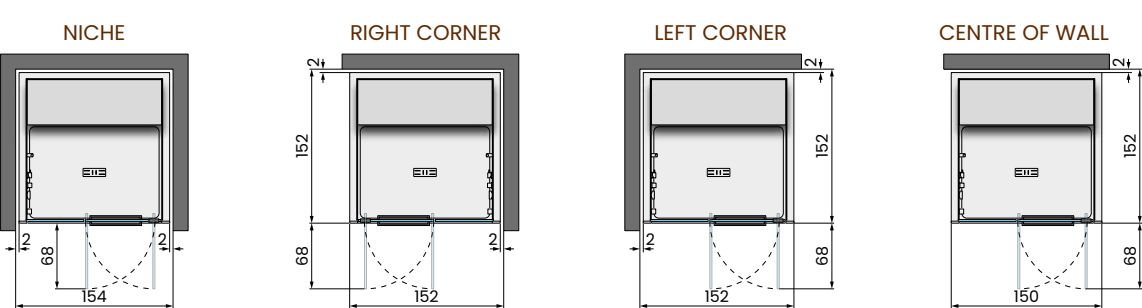


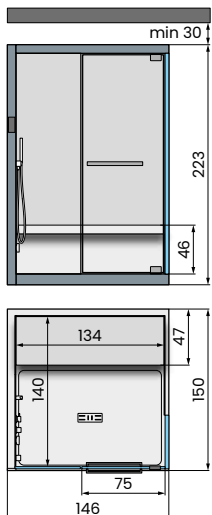

CELSIUS HAMMAM 150x150 GLASS





Power supply: 4,5kW

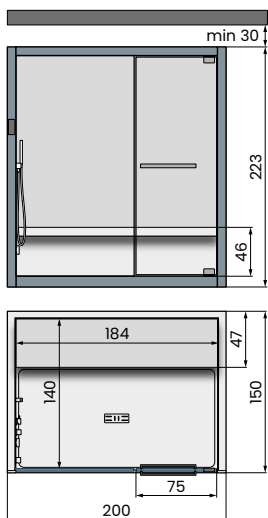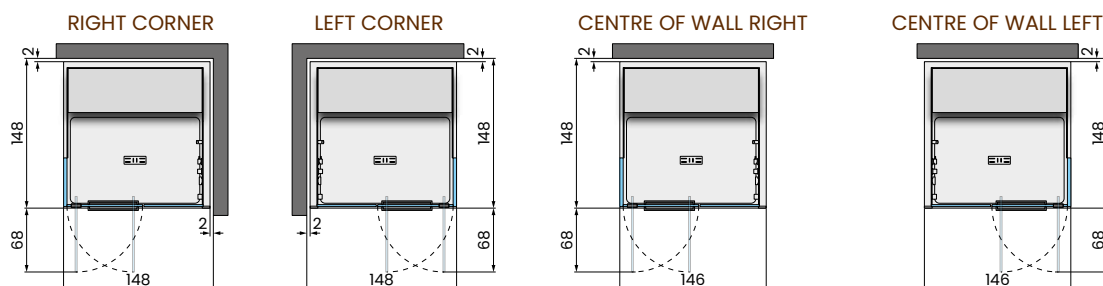

CELSIUS HAMMAM 200x150 WALL




Power supply: 6kW

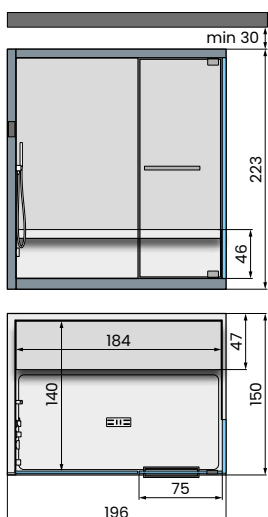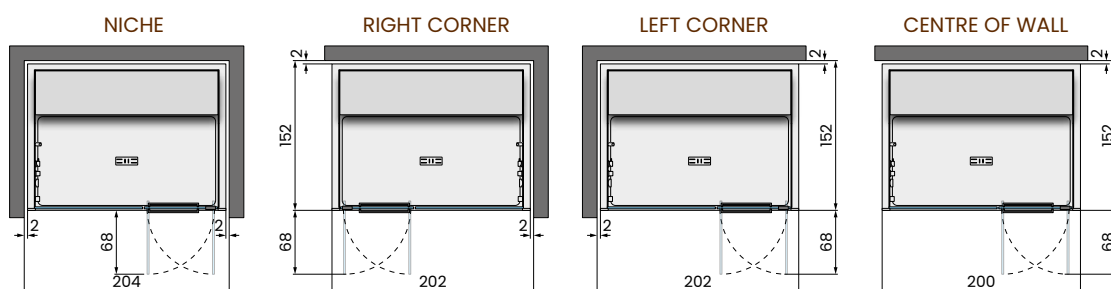

CELSIUS HAMMAM 200x150 GLASS



Power supply: 6kW

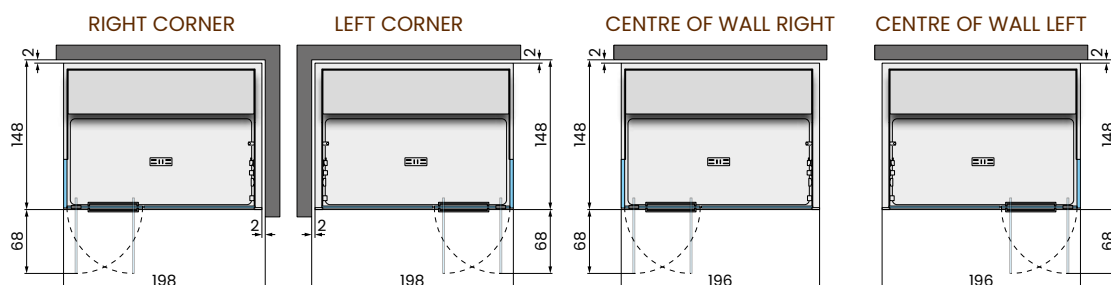

Electrical features:
Voltage 230V 1P+N / 50/60Hz

Set-ups:
Hammam
Hammam/hydro

Hydraulic characteristics:
Working pressure 2-5bar
Hot/Cold water 1/2" shower
Cold water 1/2" Steam generator*
Syphon connection Ø40 mm



***Steam generator water supply:**
For intensive use, it is mandatory to install a reverse osmosis water demineraliser (2°F).
For occasional use, a semi-automatic boiler descaling system is available.