




6 mm



5 mm
Pareti




Altezza Piatto (cm)	Dimensioni (cm)	Installazione	Codice	Vetro	Scelta finitura		
				1	AA	BA	HA
				Trasparente	Bianco	Silver	Nero
8	80 X 80	-	VERA89T-				
15	80 X 80	-	VERA80T-				
8	90 X 90	-	VERA99T-				
15	90 X 90	-	VERA90T-				
8	90 X 70	D	VERA7099DT-				
8	90 X 70	S	VERA7099ST-				
15	90 X 70	D	VERA7090DT-				
15	90 X 70	S	VERA7090ST-				
8	100 X 70	D	VERA197DT-				
8	100 X 70	S	VERA197ST-				
15	100 X 70	D	VERA107DT-				
15	100 X 70	S	VERA107ST-				
8	100 X 80	D	VERA109DT-				
8	100 X 80	S	VERA109ST-				
15	100 X 80	D	VERA100DT-				
15	100 X 80	S	VERA100ST-				

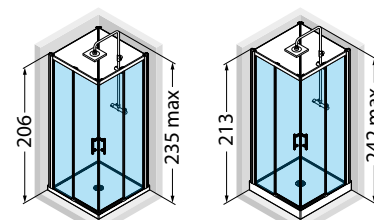


H8 misura
piatto H 8 cm

H15 misura
piatto H 15 cm

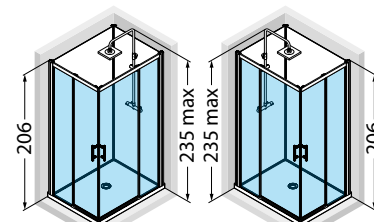


S Sinistra
H8 misura piatto H 8 cm

D Destra

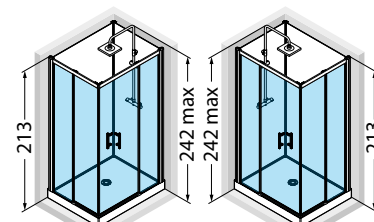


S Sinistra
H15 misura piatto H 15 cm


D Destra

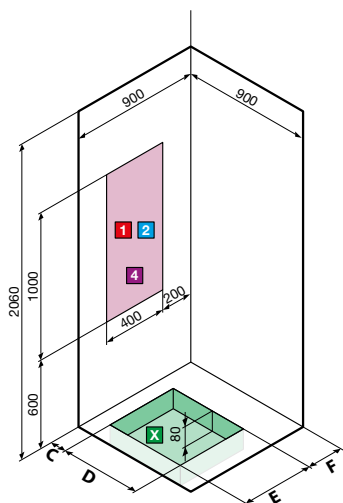

per modelli
GF80/90 - A80/90 - R90


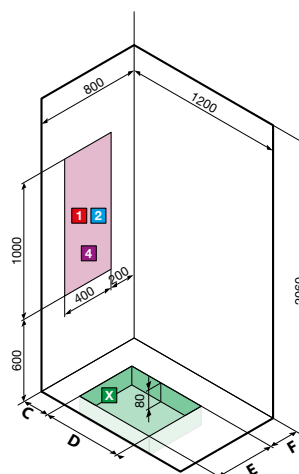


versione **sinistra**

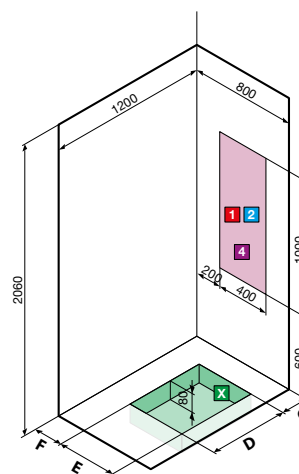


versione **destra**

modelli **A90x70/100x70/100x80 - 2P120x80 - 2P120x90**





modello	A ± 2	B ± 2	C	D	E	F
A80	800	800	100	500	450	225
A90	900	900	150	500	450	275
GF80	800	800	100	500	450	225
GF90	900	900	150	500	450	275




modello	A ± 2	B ± 2	C	D	E	F
R90	900	900	150	500	450	275

S SINISTRA

D DESTRA




modello	A ± 2	B ± 2	C	D	E	F
A90x70	900	700	150	500	400	200
A100x70	1000	700	200	500	400	200
A100x80	1000	800	200	500	450	220
2P120x80	1200	800	200	600	450	220
2P120x90	1200	900	200	600	550	220

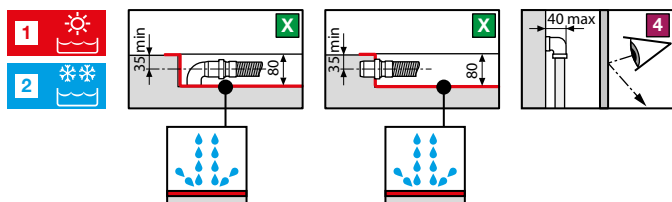


CARATTERISTICHE IDRAULICHE:


Pressione dinamica ottimale 2÷5 bar
Acqua calda 1/2"
Acqua fredda 1/2"
Allaccio sifone con raccordo ø 40 mm

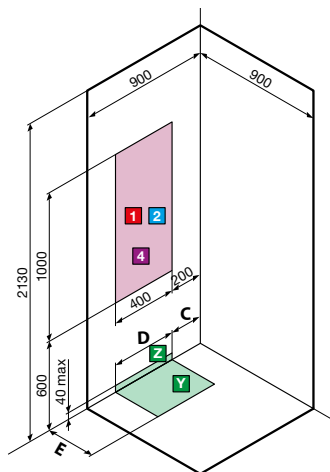


per modelli
GF80/90 - A80/90 - R90

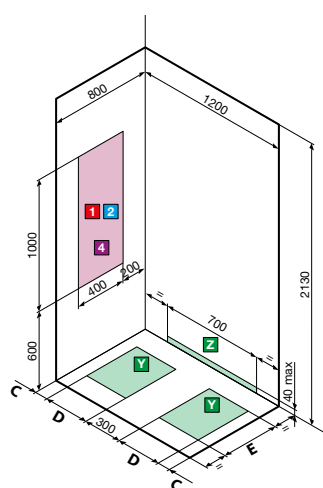


versione **sinistra**
modelli **A90x70/100x70/100x80 - 2P120x80 - 2P120x90**

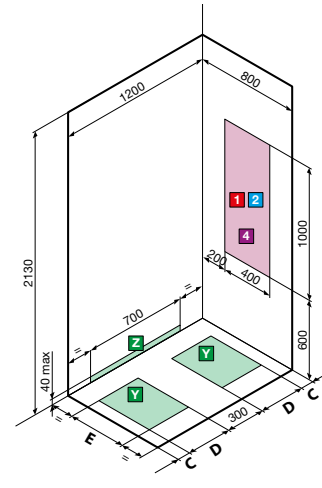

versione **destra**

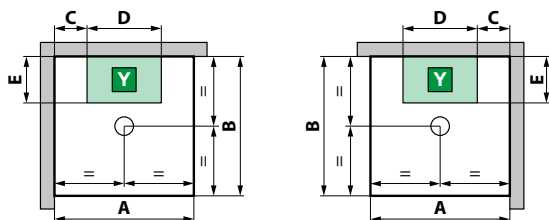


modello	A ± 4	B ± 4	C	D	E
A80	800	800	200	400	300
A90	900	900	200	500	300
GF80	800	800	200	400	300
GF90	900	900	200	500	300




modello	A ± 4	B ± 4	C	D	E
R90	900	900	200	500	300

S SINISTRA

D DESTRA

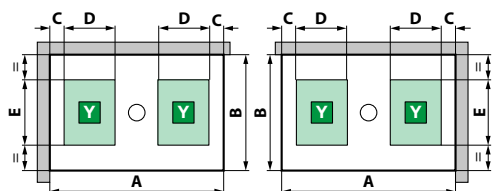

modello	A ± 4	B ± 4	C	D	E
A90x70	900	700	50	250	350
A100x70	1000	700	100	250	350
A100x80	1000	800	100	250	450
2P120x80	1200	800	100	350	450
2P120x90	1200	900	100	350	550



CARATTERISTICHE IDRAULICHE:

Pressione dinamica ottimale 2÷5 bar
Acqua calda 1/2"
Acqua fredda 1/2"
Allaccio sifone con raccordo ø 40 mm